


TIP Basic SHIMS setting for different Nitro Fuel.

FUEL / NITRO	HEAD SHIMS
16% EU	0.2mm
16%	0.25mm

ENGINE HEAD SHIM		
635900	0.10mm	Not installed
635901	0.15mm	Not installed
635902	0.20mm	Pre-installed

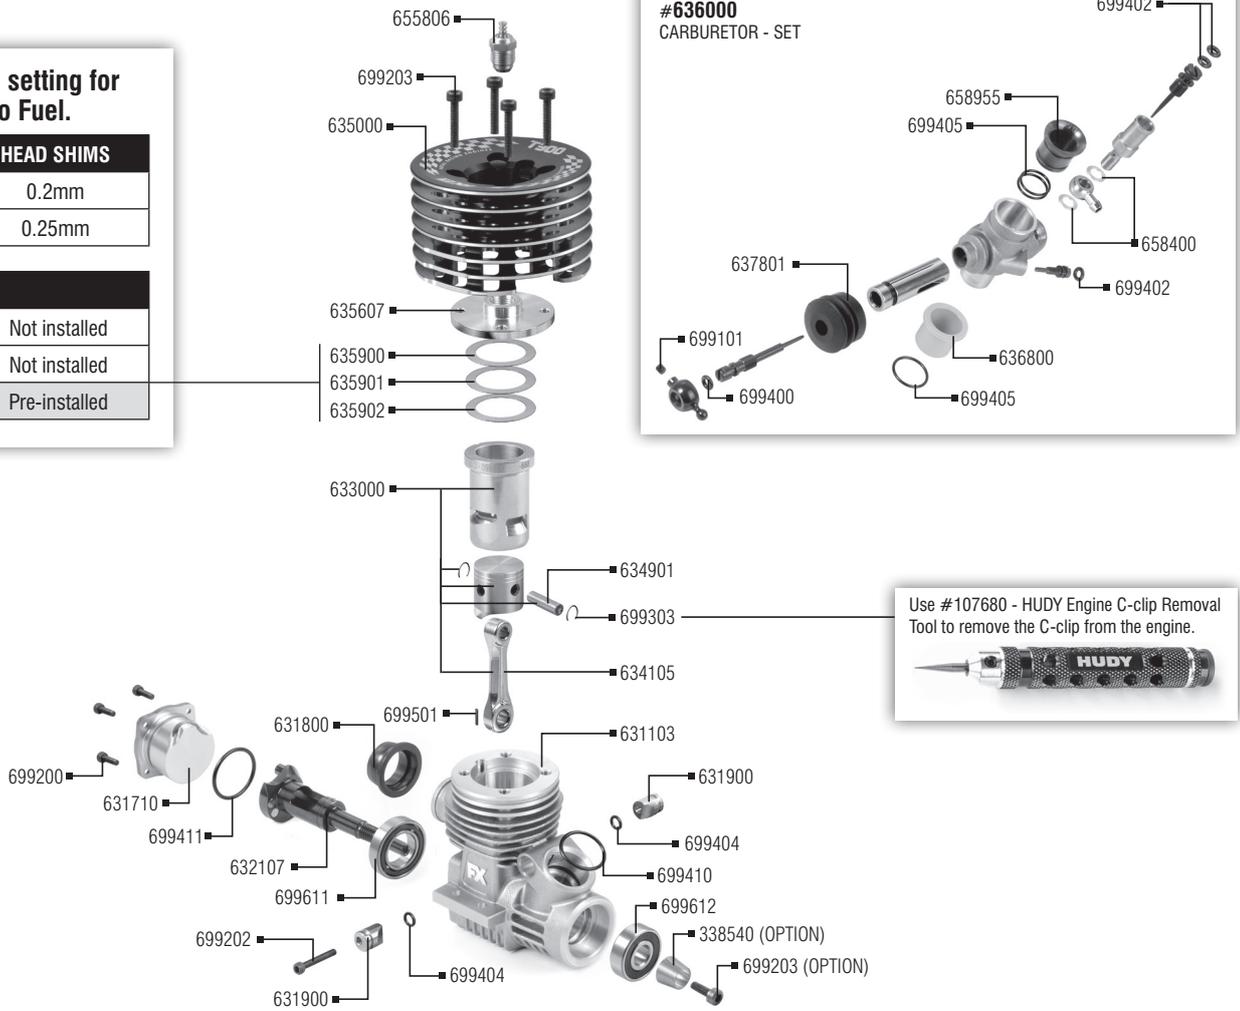


Use #107680 - HUDY Engine C-clip Removal Tool to remove the C-clip from the engine.

CARBURETOR SETTINGS

Factory carburetor setting for break-in procedure

The carburetor comes preset from factory and you have to start the break-in procedure with the following setting:

1 Main High-speed Needle (Upper)	0mm inside the needle body
2 Low-end Needle (Front)	0mm inside the needle body
3 Idle Adjustment Screw	Size measured with carburetor boot compressed approx 42mm

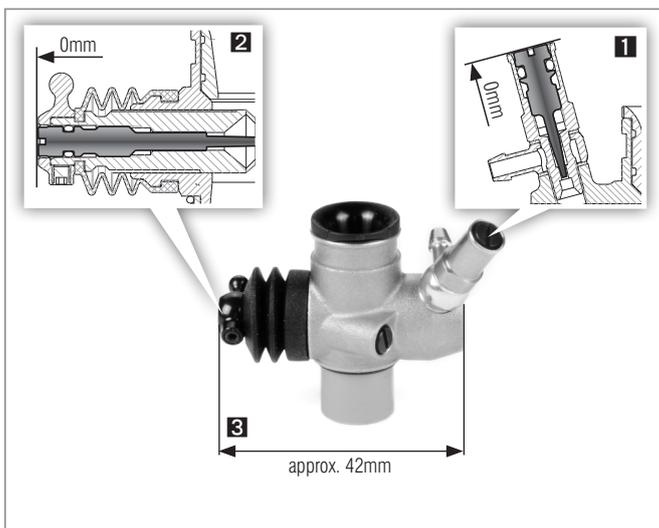

Basic Carburetor Setting after break-in procedure

After you have finished the break-in procedure this is the basic carburetor setting. Any time you get lost return back to this basic setting.

1 Main High-speed Needle (Upper)	approx. 0mm inside the needle body
2 Low-end Needle (Front)	approx. 0~0.6mm inside the needle body
3 Idle Adjustment Screw	Size measured with carburetor boot compressed 40.8mm

