


TIP Basic SHIMS setting for different Nitro Fuel.

FUEL NITRO	HEAD SHIMS	
	Altitude 0~300m	Altitude 300m +
16% EU	0.15mm	0.10mm
16~25%	0.20mm	0.15mm
30%	0.25mm	0.20mm

ENGINE HEAD SHIM		
#655901	0.10mm	Pre-installed
#655921	0.15mm	Not installed
#655922	0.20mm	Pre-installed

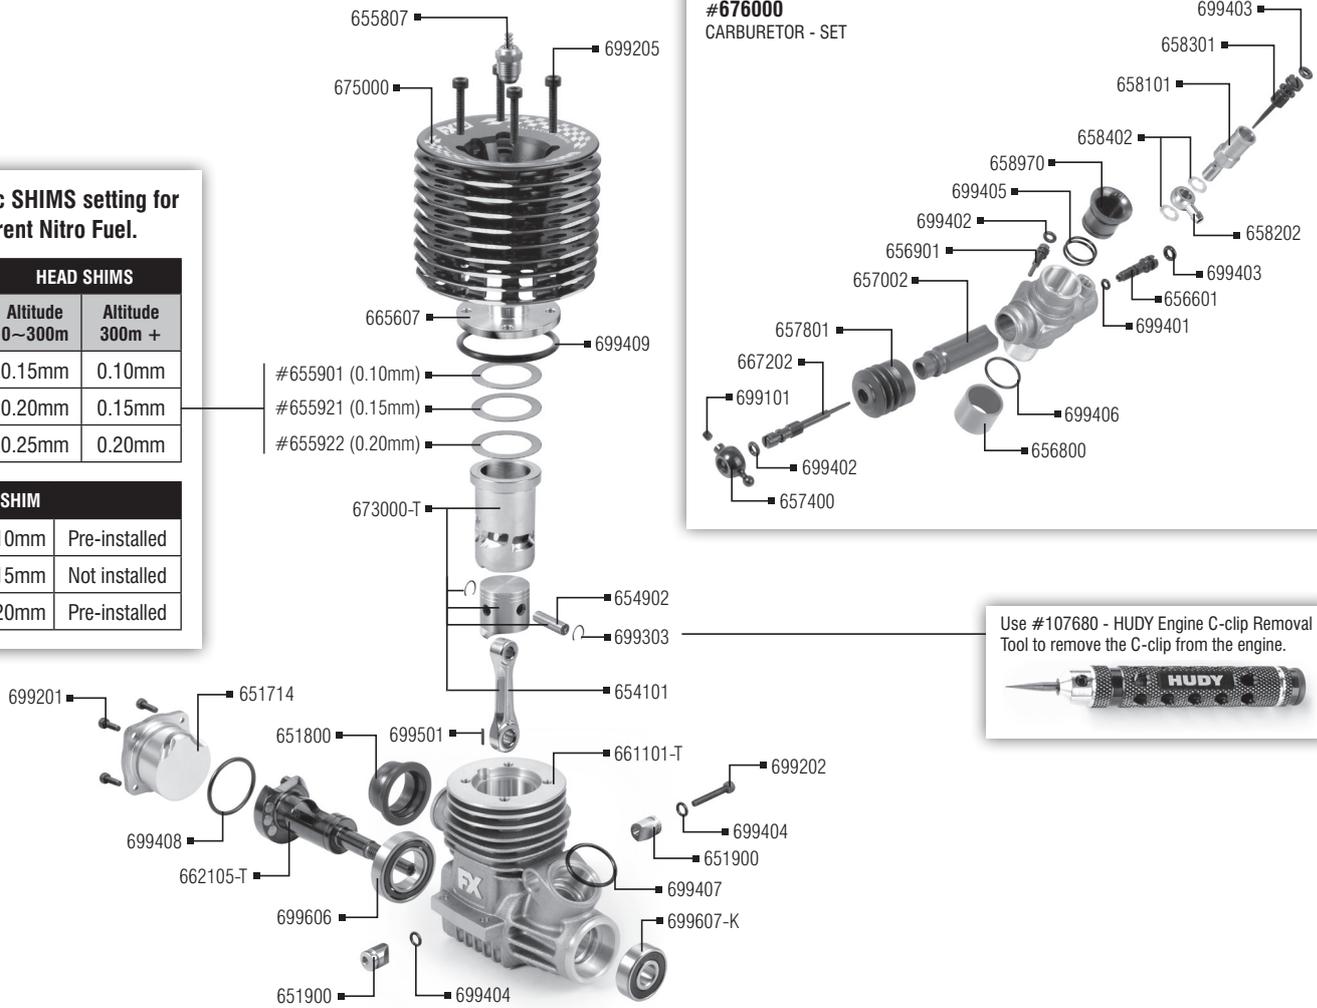


CARBURETOR SETTINGS

Factory carburetor setting for break-in procedure

The carburetor comes preset from factory and you have to start the break-in procedure with the following setting:

1 Main High-speed Needle (Upper)	0.5mm inside the needle body
2 Low-end Needle (Front)	0.5mm inside the needle body
4 Idle Adjustment Screw	Size measured with carburetor boot compressed approx 54mm

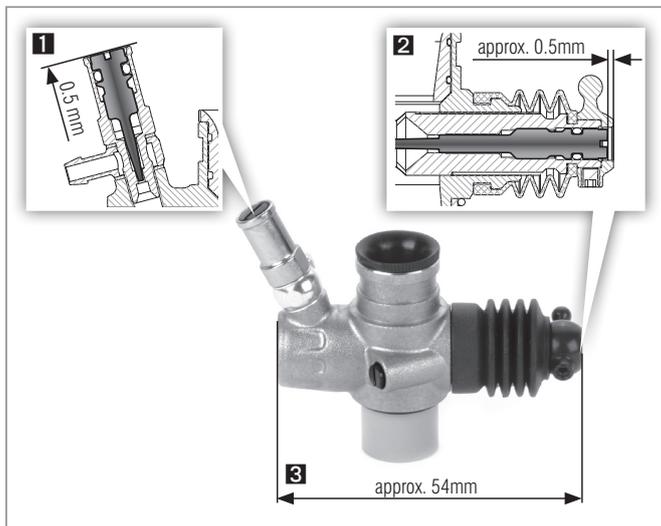

Basic Carburetor Setting after break-in procedure

After you have finished the break-in procedure this is the basic carburetor setting. Any time you get lost return back to this basic setting.

1 Main High-speed Needle (Upper)	approx. 0.8mm inside the needle body
2 Low-end Needle (Front)	approx. 0.8mm inside the needle body
4 Idle Adjustment Screw	Size measured with carburetor boot compressed approx 53.4mm

