


TIP Basic SHIMS setting for different Nitro Fuel.

FUEL / NITRO	HEAD SHIMS
16%	0.30mm
25%	0.35mm
30%	0.40mm

ENGINE HEAD SHIM		
655901	0.10mm	Not installed
655901	0.10mm	Pre-installed
655922	0.20mm	Pre-installed

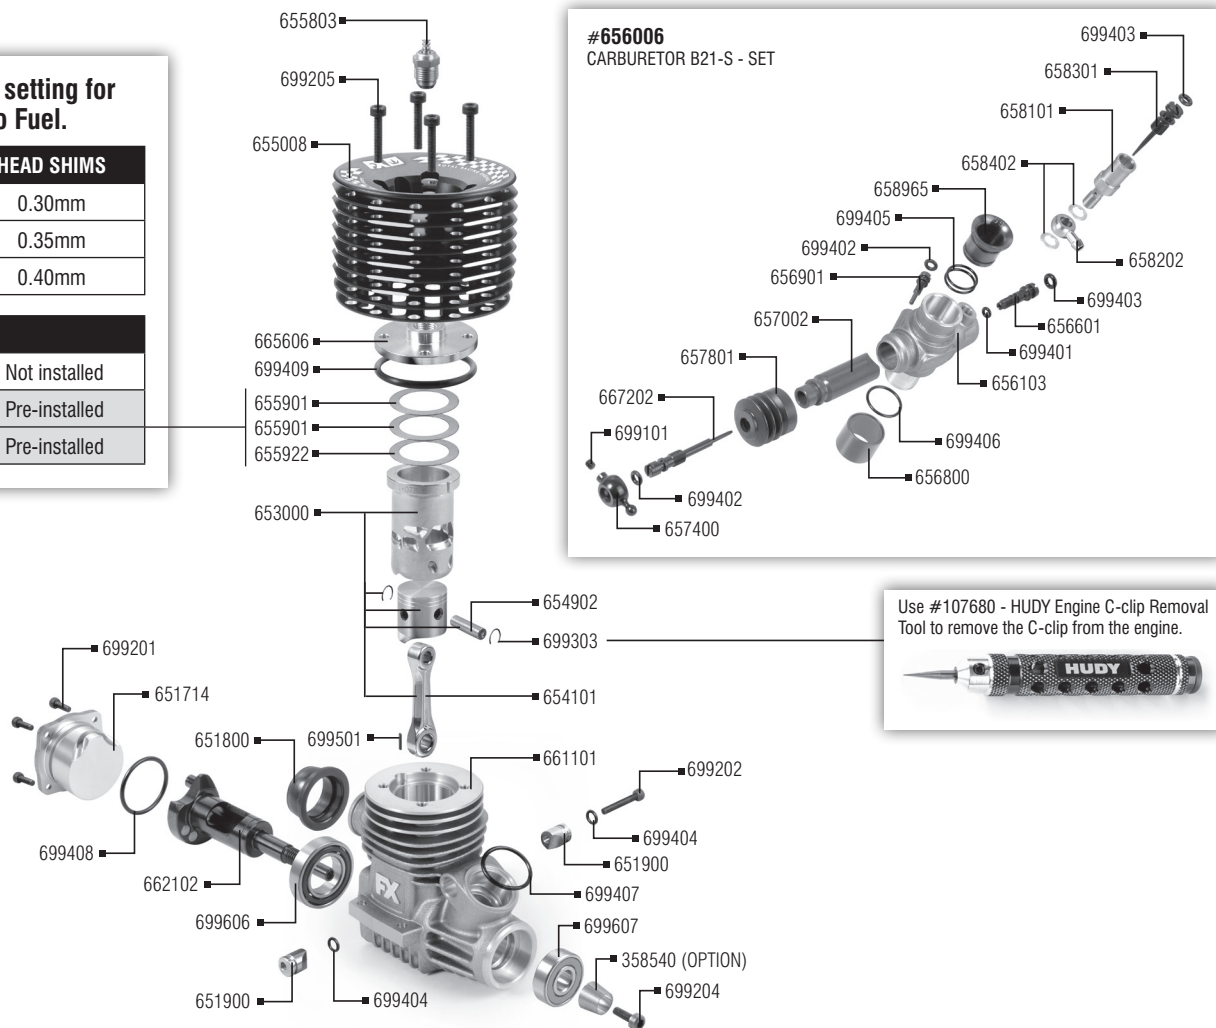


CARBURETOR SETTINGS

Factory carburetor setting for break-in procedure

The carburetor comes preset from factory and you have to start the break-in procedure with the following setting:

1 Main High-speed Needle (Upper)	approx. 0.8mm inside the needle body
2 Low-end Needle (Front)	approx. 0.8mm inside the needle body
3 Idle Adjustment Screw	Size measured with carburetor boot compressed approx. 54.2mm

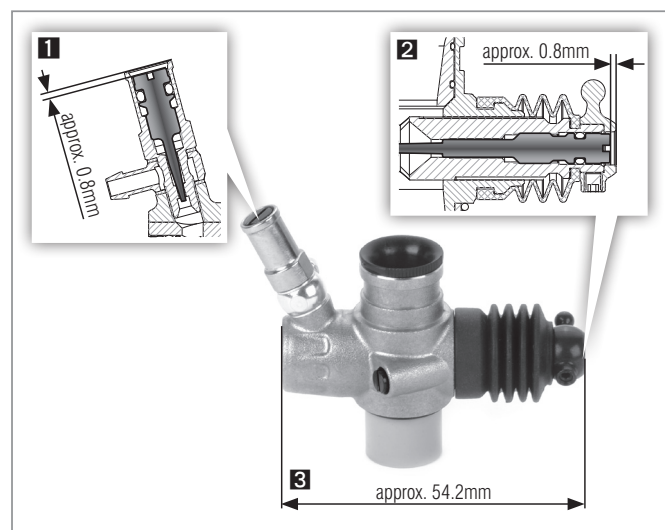

Basic Carburetor Setting after break-in procedure

After you have finished the break-in procedure this is the basic carburetor setting. Any time you get lost return back to this basic setting.

1 Main High-speed Needle (Upper)	approx. 0.8mm inside the needle body
2 Low-end Needle (Front)	approx. 0.8mm inside the needle body
3 Idle Adjustment Screw	Size measured with carburetor boot compressed approx. 53.2mm

